


RÖMER KID

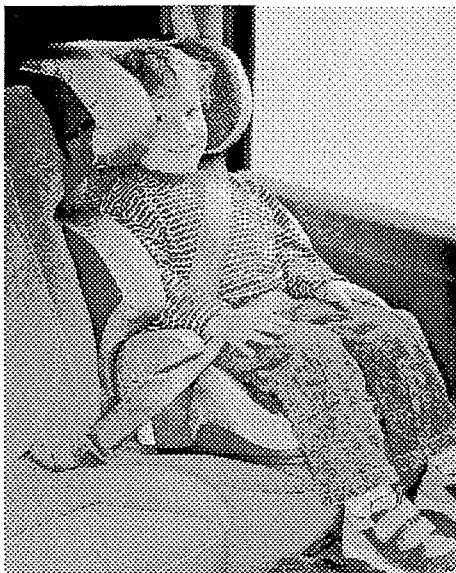

Instructions

We are pleased that our RÖMER KID may accompany your child safely through a new period of its life.

In order to protect your child correctly, the RÖMER KID must always be used and installed as described in these instructions.

If you have any further questions regarding the use, please feel free to contact us.

BRITAX RÖMER
Kindersicherheit GmbH

Contents

1. Suitability.....	4
2. Use in the vehicle	4
3. Securing your child in the car	6
3.1 Fitting the backrest	8
3.2 Height adjustment of the headrest	10
3.3 Resting position of the backrest .	12
3.4 Restraining the child	14
3.5 Checklist for correctly securing your child	18
4. Care instructions	18
4.1 Cleaning	20
4.2 Removing the cover	20
4.3 Re-fitting the cover	22
5. Tips regarding disposal	22
6. 2 years guarantee	22
7. Guarantee Card / Transfer-Check .	27

part number: 09163188 (GM) / 93181287 (Vauxhall)


1. Suitability

Certification


Child safety seat	Test and certification to ECE* R 44/03		
	Group	Body weight	Age range
RÖMER KID	II+III	15 to 36 kg	3 to 12 years


*ECE = European Standard for Safety Equipment

- The child safety seat is designed, tested and approved to the requirements of the European Regulation for Child Safety Equipment (ECE R 44/03).
The approval E (ringed) and approval number are found on the approval label (on car child seat).
- The RÖMER KID has been tested and approved as a combination of booster seat with a backrest.
Caution! Neither the booster seat nor the backrest must be used with other booster seats or backrests.
- No modifications may be made to the child safety seat other than by the manufacturer. If modifications are made the approval is no longer valid.

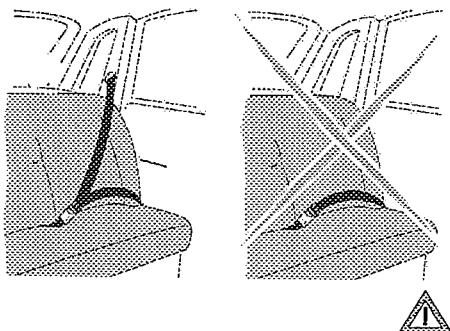


2. Use in the vehicle

 **Danger!** Using this child seat with a 2-point lap belt only can in an accident lead to severe injuries or even death.

 **Never use in connection with a 2-point belt!**

part number: 09163188 (GM) / 93181287 (Vauxhall)

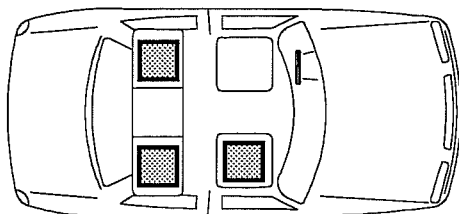

This is how you can use your child safety seat:

forward facing	yes
rearward facing	no 1)
with 2-point belt	no
with 3-point belt 2)	yes
on front passenger seat	yes 3)
on outer rear seat	yes
on centre rear seat	no 4)

1) use only permissible on a rearward facing vehicle seat (for instance in a van / minibus) which is also approved for the transport of adults. An airbag must not act upon the seat.

2) The belt has to be approved to ECE R 16 or comparable standard (see test label on belt with "E" or "e").

3) for passenger seat with front-airbag, slide vehicle seat far back; follow the instructions in the vehicle manual.

4) Use is only possible if the vehicle seat is equipped with 3-point belt.

3. Securing your child in the car



For the protection of your child

- For maximum protection the following rule applies: the closer the adult seat belt lies to the body of the child the better the protection.
- Use on the rear seat: Slide the front seat forward far enough that the child's feet do not contact the backrest of the front seat (danger of injury).
- Please do not leave your child unattended in the child safety seat in the car.
- To prevent your child from being exposed to unnecessary heat, **do not** leave the child safety seat in direct sunlight when it is not in use.
- Ensure that your child only gets into and out of the vehicle on the side where the pavement is.
- Make plenty of breaks during a long journey so that your child has plenty of opportunity to move around and use up his/her energy.



To protect all vehicle passengers

In case of an emergency stop or an accident unrestrained persons or objects may injure other passengers. Please always check that...


- the backrests of the vehicle seats are locked (e. g. that a foldable rear seat bench latch is engaged)
- all heavy or sharp-edged objects in the vehicle (e. g. on the parcel shelf) are restrained
- all passengers in the vehicle are restrained
- the child safety seat is always restrained in the car, even if no child is being transported.

To protect your vehicle


- Some car seat covers of sensitive materials (e. g. velour, leather etc.) can show marks when using car child seats. These marks can be avoided by placing a blanket or towel on the vehicle seat.

3.1 Fitting the backrest


The child seat consists of a booster seat 1 and a backrest 2 with adjustable headrest 3. The combination offers your child the protection and comfort desired.

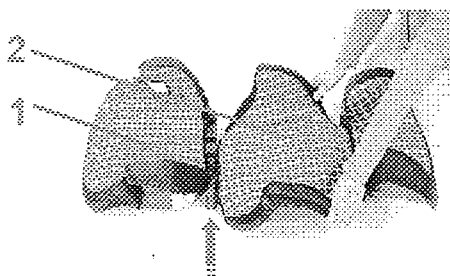

- Place the backrest 2 level behind the booster seat 1.

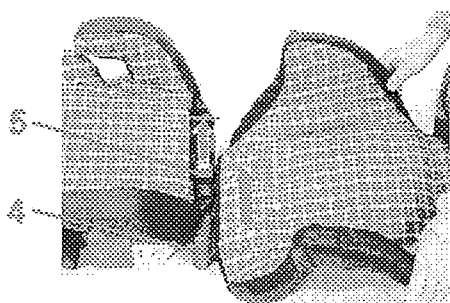

- Slide the pivot axis 4 of the backrest 2 as far as possible into the guide 5 of the booster seat 1.

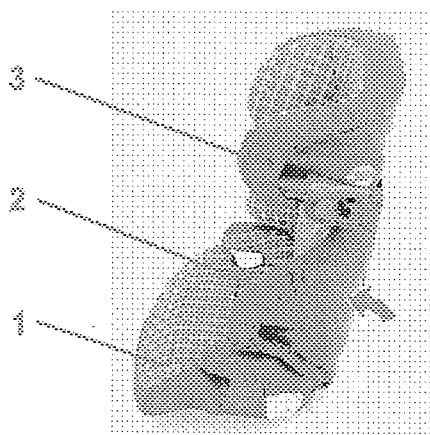



- Swing the backrest 2 upwards, until it engages.

3.2 Height adjustment of the headrest

A correctly adjusted headrest 3 guarantees an optimal run of the diagonal belt section 6, and offers your child the protection and comfort desired. You can lock the height of the headrest 3 in eleven positions.

- The position of the headrest 3 must allow a width of two fingers between the shoulders of your child and the headrest 3.

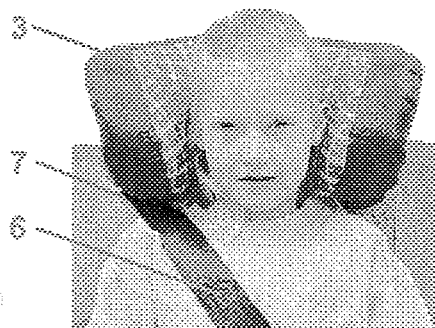

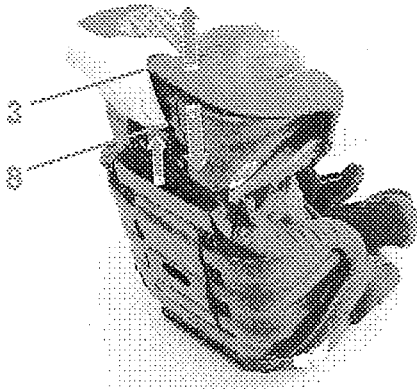



To adjust the height of the headrest 2 to the size of your child:

- 1. Let your child sit down in the child safety seat.
- 2. Take the adjusting handle 8 on the back of the headrest 2 and squeeze upwards. Now the headrest is unlocked.
- 3. Position the unlocked headrest 2 to the height desired. As soon as you release the adjusting handle 8 the headrest is locked into place.

3.3 Resting position of the backrest


The backrest 2 of the child safety seat is adjustable to the angle of the vehicle seat. Please observe: The best possible protection is only guaranteed when the vehicle seat is in upright position. The backrest of the child safety seat can be moved back into the resting position, irrespective of the vehicle seat.

- 1. Pull out the distance flap 8 on the rear side of the backrest 2.
- 2. Recline the backrest 2 as far as possible until the distance flap surface 8 rests fully on the back of the vehicle seat. **Caution!** Do not recline the backrest 2 further than the distance flap 8 allows.

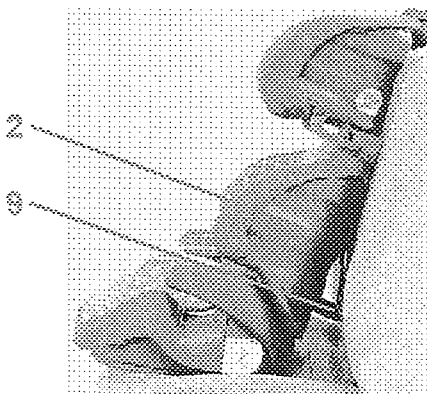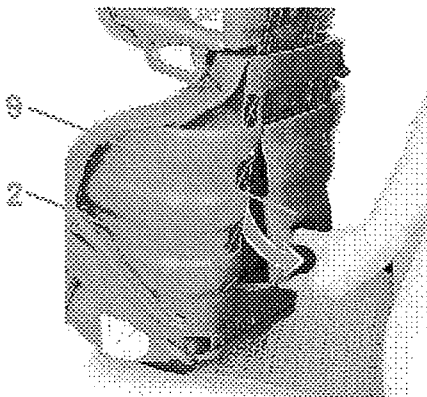

3.4 Restraining the child

The RÖMER KID itself does not have to be secured in the car. When sitting in the RÖMER KID your child is simply secured with the vehicle seat belt.

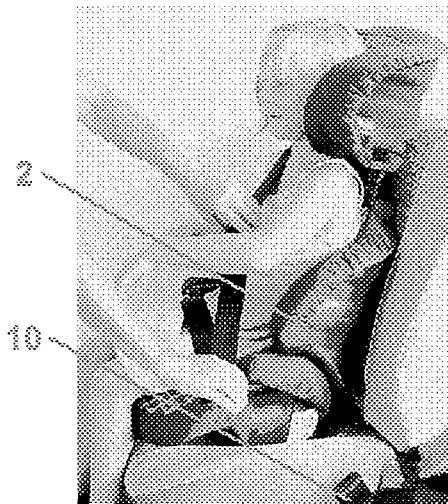


1. Fit vehicle seat belt

- Place the child seat onto the vehicle seat. Ensure that the backrest 2 abuts with its entire surface to the backrest of the vehicle seat.

Tip! If the headrest of the vehicle seat is in the way, just turn it around.


- Let your child be seated in the child seat.
 - Pull out the vehicle seat belt and lead it in front of the child to the belt buckle 10.
- Caution!** Do not twist the belt.
- Lock the tongue in the belt buckle 10. CLICK!

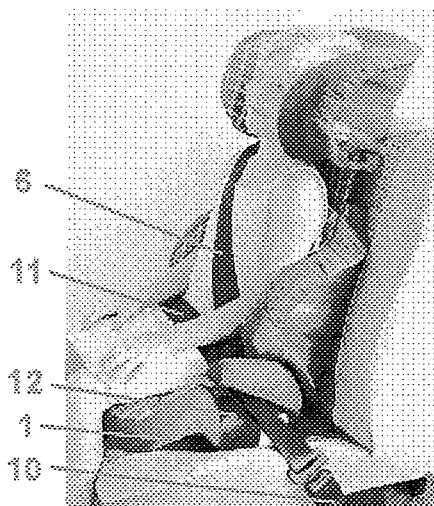

2. Place the vehicle seat belt into the red belt guides on the child seat.


- Place the diagonal belt section 8 and the lap belt section 11 on the side of the belt buckle 10, under the armrest, into the red belt guide 12 of the booster cushion 1.

Caution! The belt buckle 10 must not lie between the red belt guide 12 and the armrest.

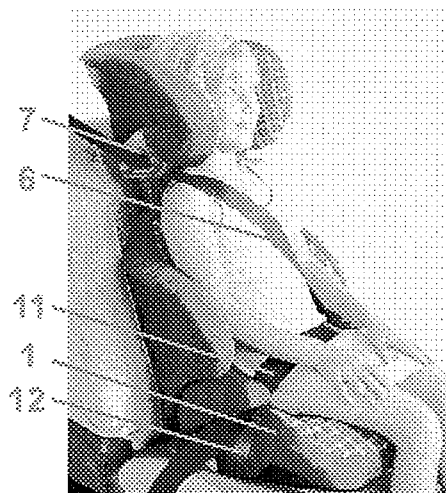


- Place the lap belt section 11 on the other side of the booster cushion 1 also into the red belt guide 12.

Caution! The lap belt section 11 must on both sides pass as low as possible over your child's pelvis.

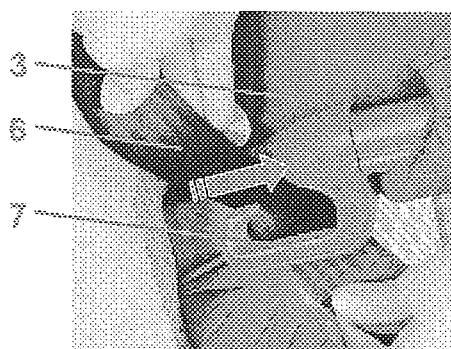


- Place the diagonal belt section 6 into the red belt holder 7 of the headrest 3 until it slips behind the security nose.

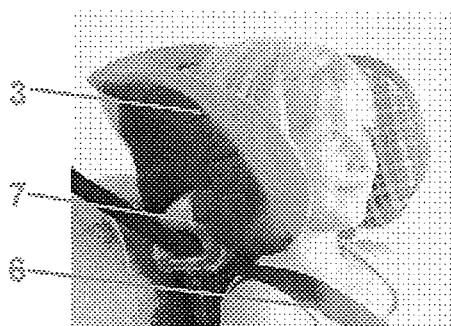

- Ensure that the diagonal belt section 6 leads over the collarbone of your child and not against his/her neck.
- Tip!** You can still adjust the height of the headrest 3 in the car.

- Caution!** The diagonal belt section 6 must lead diagonally backwards.
- Tip!** you can regulate the belt run with the adjustable pillar loop of your car.

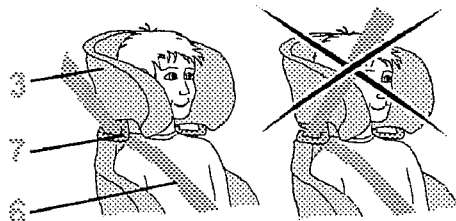

⚠ **Caution!** The diagonal belt section 6 must lead backward. It **must never lead forward** to the belt anchor point of the car.



Tip! In this case use the child seat only on the rear seat.

➤ Tighten the vehicle belt by pulling the diagonal belt section 6.

3.5 Checklist for correctly securing your child

⚠ **For the safety of your child ensure that...**

- the lap belt section 11 runs through the red belt guides 12 on both sides of the booster cushion,
- the diagonal belt section 6 on the side of the buckle 10 also runs through the red belt guide 12 of the booster cushion,
- the diagonal belt section 6 runs through the belt holder 7 of the headrest.
- The diagonal belt section 6 leads backward,
- the belts are tight and not twisted,
- the belt buckle 10 does not lie between the red belt guide 12 and the armrest of the booster cushion.

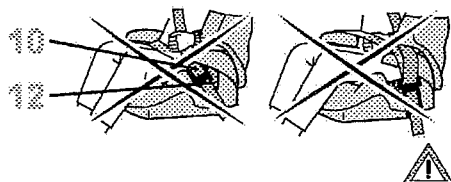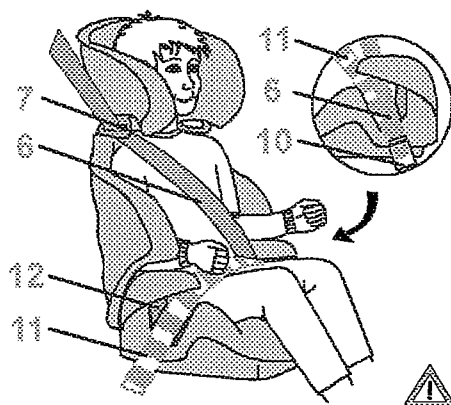

4. Care instructions

⚠ **To retain the protective effect**

- In an accident at a collision speed above 10 km/h the child seat could suffer damage which is not necessarily visible. In this case, the child seat must be replaced or inspected by the manufacturer.



- Regularly check all important parts for damage. Ensure the correct operation of all mechanical components.
- To prevent the risk of damage or breakage ensure that the child seat does not become trapped by a movable or trapped by a movable car seat or in the door of your car.
- Should the child seat be damaged (for instance after dropping it) it must be inspected by the manufacturer.


4.1 Cleaning

Please ensure that you only use original RÖMER replacement seat covers, because the seat cover fulfils an essential part of the system functions. Replacement seat covers are available from your retailers or from an ADAC branch.



The child seat **must not be used without the seat cover.**

- The **cover** can be removed and washed with a mild detergent in the washing machine's cycle for delicate washing (30 °C). Please observe the instructions on the washing label of the cover exactly. If washed at more than 30 °C, the colours of the cover may fade.
Do not spin or tumble dry (fabric may separate from padding)!
- The **plastic parts** can be cleaned with soapy water. **Do not** use harsh cleaning agents (like solvents).

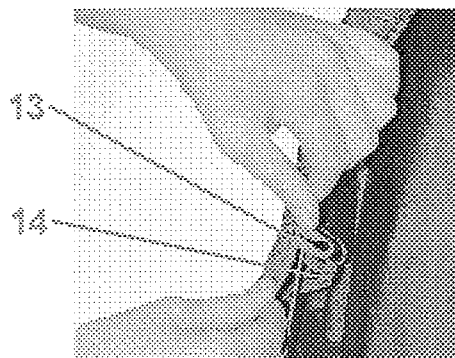

4.2 Removing the cover

- Take the elastics 13 of the cover off the hooks 14 under the edge of the child seat
- Now you can pull the cover off.

4.3 Re-fitting the cover

- Place the cover on the child seat.
- Place the elastics 13 of the cover around the hooks 14 under the edge of the child seat.

5. Tips regarding disposal

Please observe the disposal regulations of your country.

dispose of packaging	
	container for paperboard
dispose of components	
cover	garbage, thermal utilisation
plastic parts	according to the identification on the part into containers provided
metal parts	container for metals

6. 2 years guarantee

For this car/bicycle child seat we issue a guarantee on manufacturing or material faults of 2 years. The guarantee period is effective from the day of purchase. As proof please retain the filled out Guarantee Card, the Transfer-Check as well as your receipt for the whole term of the guarantee period.

In case of a complaint, the Guarantee Card must be returned with the product.

part number: 09163188 (GM) / 93181287 (Vauxhall)

The guarantee service is limited to car/ bicycle child seats which have been handled appropriately and which have been sent to us in clean condition.

The guarantee does not include:

- natural signs of wear and damage caused by excessive stress.
- damages caused by abuse, misuse or negligence.

What is covered by the Guarantee?

Fabric: All our fabrics meet very high requirements with regard to colour fastness when exposed to UV-radiation. However all fabrics fade when exposed to UV-radiation. This is not a material defect, but a normal sign of wear which is not covered by the Guarantee.

Buckle: Buckle malfunction is often due to food and drink finding their way inside the buckle which can stop it from working properly. In the event of this happening, the buckle can be washed out. Please refer to your user instructions.

If the product is under guarantee please contact the retailer. He will advise and support you. When processing complaints, specific product depreciation rates will be applied. In this case please refer to our General Terms and Conditions which are available from your retailer.

Use, care and maintenance

The car/bicycle child seat must be used in accordance with the user instructions. We would like to point out that it is extremely important that only RÖMER accessories and replacement parts are used.

part number: 09163188 (GM) / 93181287 (Vauxhall)

7. Guarantee Card / Transfer-Check

Name: _____

Address: _____

Post Code: _____

Place: _____

Telephone No.
(including area code): _____

e-mail address: _____

Car/bicycle child seat: _____

Article-No.: _____

Design: _____

Accessories: _____

Transfer-Check:

- | | | |
|-----------------------------|-------------------------------------|---|
| 1. Completeness | <input type="radio"/> examined / OK | <input type="radio"/> I have examined the car/bicycle child seat and ensured that the seat has been sold to the above customer in a complete and fully functional condition. |
| 2. Function test | | |
| - Seat adjustment mechanism | <input type="radio"/> examined / OK | <input type="radio"/> I have obtained sufficient information on the above product and its functions before purchase and noted the manufacturer's user instructions supplied with the product. |
| - Belt adjustment | <input type="radio"/> examined / OK | |
| 3. Intactness | | |
| - Seat | <input type="radio"/> examined / OK | |
| - Fabrics | <input type="radio"/> examined / OK | |
| - Plastic parts | <input type="radio"/> examined / OK | |

Date of purchase: _____

Buyer (signature): _____

Retailer: _____

Retailer's stamp