

## RÖMER BABY-SAFE plus



SP

### User instructions

We are pleased that our RÖMER BABY-SAFE plus may accompany your child safely through the first months of his or her life.

**In order to protect your baby correctly, the RÖMER BABY-SAFE plus must always be used and installed as described in these instructions.**

If you have any further questions regarding its use, please feel free to contact us.

BRITAX RÖMER  
Kindersicherheit GmbH


RÖMER Child safety seat	Test and certification to ECE* R 44/03	
	Group	Body weight
BABY-SAFE plus	0+	to 13 kg

\*ECE = European Standard for Safety Equipment

## 1. Suitability

### Certification

- The child safety seat has been designed, tested and certified to the requirements of the European Standard for Child Safety Equipment (ECE R 44/03).  
The seal of approval E (in a circle) and the approval number are located on the approval label (sticker on the child safety seat).
- This approval shall be invalidated if you make any modifications to the child safety seat. No modifications may be made to the child safety seat other than by the manufacturer.

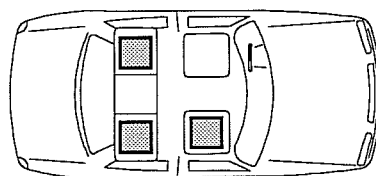

## 2. Use in the vehicle

**Danger!** An airbag hitting the baby seat can cause serious injuries to your child, possibly resulting in death.



**DO NOT use on a passenger seat with a front airbag! 3)**

Please observe the instructions in your vehicle manual for the use of child seats.

**This is how you can use your child safety seat:**

forward facing	no
rearward facing	yes
with 2-point belt	no 1)
with 3-point belt 2)	yes
on front passenger seat	yes 3)
on outer rear seat	yes
on centre rear seat	no 4)

(Please observe the relevant regulations in your country.)



- 1) The use of a 2-point belt substantially increases the risk of injury to your child in the event of an accident.
- 2) The safety belt must be approved to ECE R 16 or a comparable standard (see test label on belt with an "E" or "e" in a circle).
- 3) DO NOT use on a passenger seat with a front airbag!
- 4) Can be used if the vehicle seat is equipped with a 3-point belt.

### 3. Securing your baby




#### For the protection of your baby

- Always secure your baby in the baby seat using the seat belt.
- Never leave your baby unattended in the baby seat when placing it on elevated surfaces (e.g. a table, nappy changing unit, etc.).
- **Caution!** The plastic parts of the baby seat heat up in the sun, so that your baby may get burnt. Protect your baby and the baby seat against intensive solar



radiation (e.g. by putting a light cloth over the seat).

- The baby seat requires only one seating position in the car. This advantage means, however, that your baby must be in a semi-reclined position. Take your baby out of the baby seat as often as possible to relieve its spine. We recommend frequent breaks during long journeys. Even outside of the car, please avoid leaving your baby in the baby seat for too long.
- The head support is used to provide extra comfort for very small babies. **Caution!** Only use the head support when the headrest is in the lowest position (see 3.1).


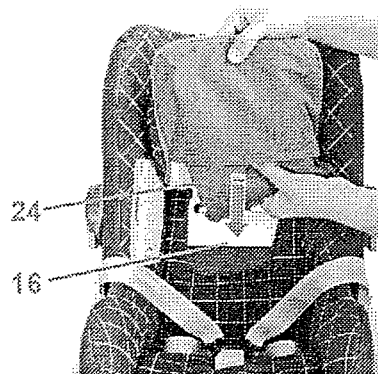


### 3.1 Removing the head support

**The head support 24 gives your baby the necessary support while he or she is still small.**

You can use the head support 24 until your baby has grown to a size where you must adjust the height of the head rest 16 from the lowest position to a higher one (see 3.3).

- ✎ Pull the head support 24 out of its pocket in the head support cover.

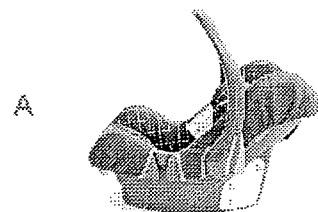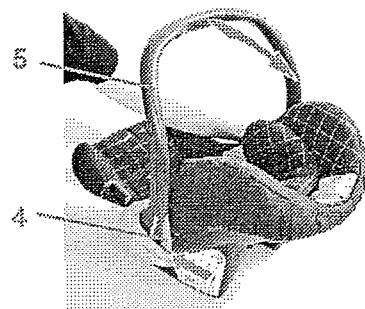


### 3.2 Adjusting the handle

**You can engage the handle in three positions:**


- ✎ Simultaneously press both buttons 4 on the handle 5.
- ✎ Then whilst holding the buttons pressed 4 turn the handle 5 backwards or forwards into the desired position.

- A : For carrying and for transport in the car

B

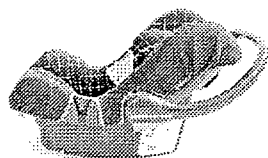


C

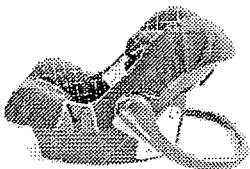

- B : For placing your baby into the baby seat

- C : For setting the baby seat down safely outside the car

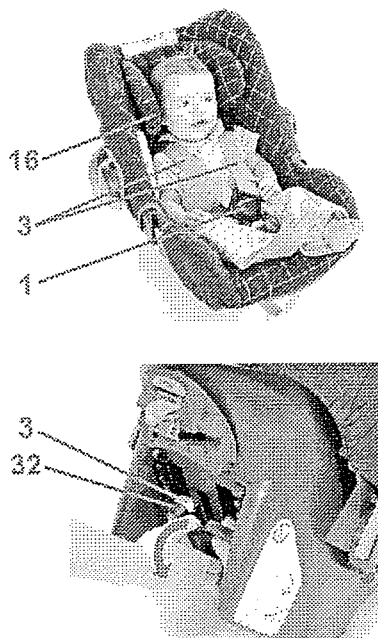

32

### 3.3 Adjusting the headrest



A correctly adjusted headrest 16 ensures your baby's optimal posture in the baby seat.

The headrest 16 must be adjusted so that the shoulder straps 3 are at the same level as your baby's shoulders or slightly below.

To adjust the height of the headrest 16 to fit your baby:

- ✎ Open the harness buckle 1 (press the red release button).
- ✎ Tilt the headrest adjuster 32 until it disengages.



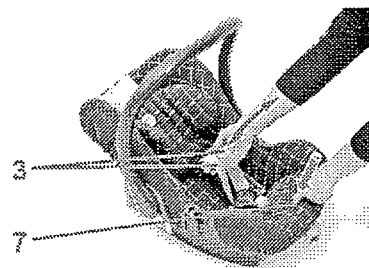
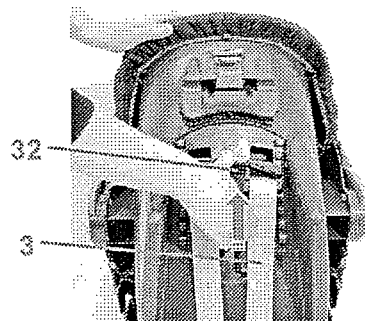


58

- Slide the headrest adjuster 32 until the shoulder straps are at the correct height and re-engage.

#### 3.4 Loosening the shoulder straps


- Press the adjustment button 7 and at the same time pull both shoulder straps 3 forward.

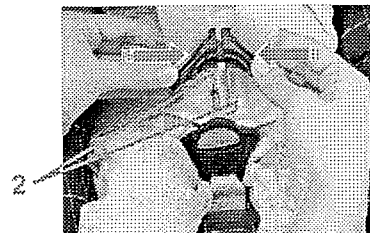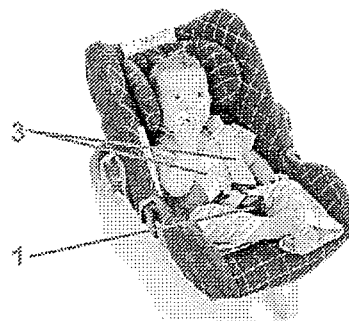

3.5

### 3.5 Securing your baby using the harness

- ❖ Loosening the shoulder straps.  
(see 3.4)
- ❖ Open the harness buckle 1 (press the red release button).
- ❖ Place your baby into the baby seat.
- ❖ Put the shoulder straps 3 over the shoulders of your baby.  
**Caution!** Do not twist or interchange the shoulder straps.
- ❖ Put the two buckle tongues 2 together...

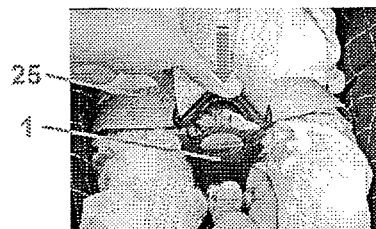

62

✎ ...and engage in the harness buckle 1 with an audible CLICK!


✎ Tighten the straps until they are in contact with your baby's body.  
(see 3.6)

**Caution!** The hip belt 25 must lie as low as possible over your baby's hips.

### 3.6 Tightening the harness

✎ Pull the strap end 8.

**Caution!** Pull the strap end straight towards you, not upwards or downwards.

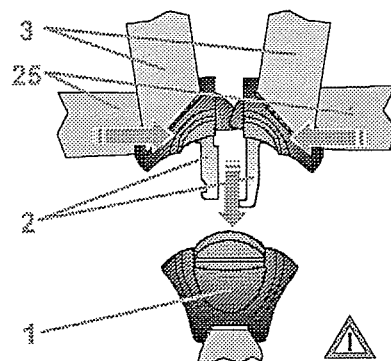

### 3.7 Checklist to ensure that your baby is buckled up correctly



**For the safety of your baby, please check that...**

- the shoulder straps 3 of the baby seat are close to the body without constricting the baby,
- the shoulder straps 3 are adjusted correctly,
- the shoulder straps 3 are not twisted,
- the buckle tongues 2 are engaged in the harness buckle 1.



#### 4. Installation in the vehicle



Please do not leave your child unattended in the child safety seat in the vehicle.



#### For the protection of all vehicle occupants

In the case of an emergency stop or an accident unsecured persons or objects may cause injury to other vehicle occupants. Please always check that...


- the backrests of the vehicle seats are locked (i.e. that a foldable rear seat bench latch is engaged).
- all heavy or sharp-edged objects in the vehicle (e.g. on the parcel shelf) are secured.
- all persons in the vehicle have their seat belts fastened.



- the child safety seat is always secured when it is in the vehicle, even if no child is being transported.

#### To protect your vehicle


- Some vehicle seat covers of sensitive materials (e.g. velour, leather, etc.) may develop wear marks when child seats are used. This can be avoided by placing a blanket or towel under the child seat.

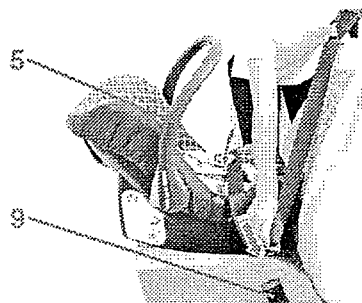

#### 4.1 Securing the baby seat in your vehicle

To secure the baby seat using the 3-point belt of your vehicle proceed as follows:

- ✎ Place the baby seat rearward-facing on the vehicle seat (baby is facing backwards).  
**Tip!** In certain cases it is possible that the baby seat does not rest securely or is inclined too steeply on the vehicle seat. This can be remedied by placing a blanket under the child seat or choosing another seating position.
- ✎ Ensure that the handle 5 is in its upper position A.
- ✎ Pull out the vehicle seat belt and place it across the baby seat.
- ✎ Engage the buckle tongue in the vehicle seat buckle 9.

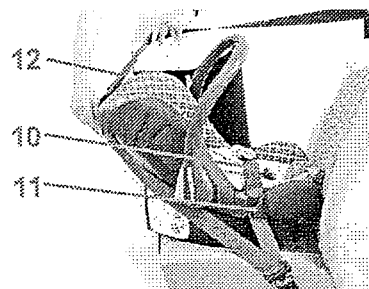



- ❖ Place the lap belt section 10 in the light blue belt guides 11 on both sides of the baby seat.

**Caution!** Do not twist the belt.

- ❖ Tighten the lap belt section 10 by pulling the diagonal belt section 12.

**Caution!** The buckle 9 of the vehicle seat belt must not be positioned in or in front of the light blue belt guide 11 (in the direction of travel).

- ❖ Pull the diagonal seat belt section 12 behind the top end of the baby seat.

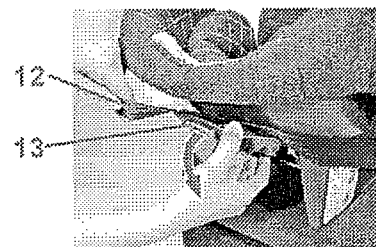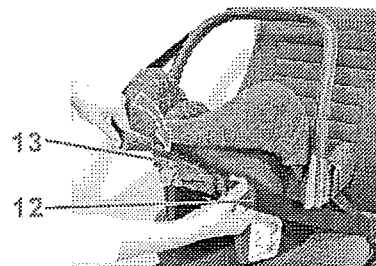

- Push the diagonal belt section 12 between the dark blue holder 13 and the baby seat until the belt engages.



**Caution!** Do not twist the belt.

- Tighten up the diagonal belt section 12.

#### Removal

- Pull the dark blue holder 13 a little away from the baby seat to unhook the diagonal belt section 12.
- Open the vehicle seat buckle 9 and take the lap belt section 10 out of the light blue belt guides 11.



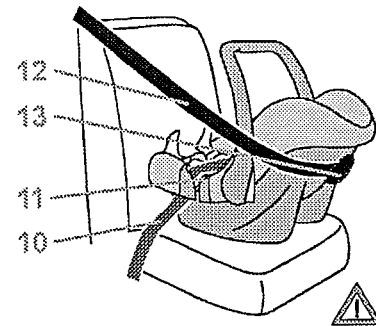
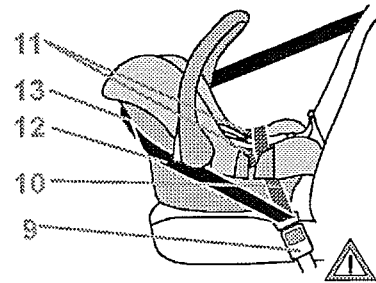


#### 4.2 Checklist for the correct installation of the baby seat in your car



For the safety of your baby, please check that...

- the baby seat is installed rearward-facing,
- the baby seat is only installed on the front passenger seat if no front airbag can strike the baby seat,
- the baby seat is only secured using a 3-point belt,
- the lap belt section 10 runs through both light blue belt guides 11 on the baby seat,
- the diagonal belt section 12 runs through the blue belt holder 13 and the baby seat,

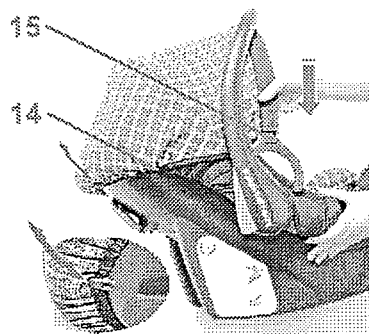
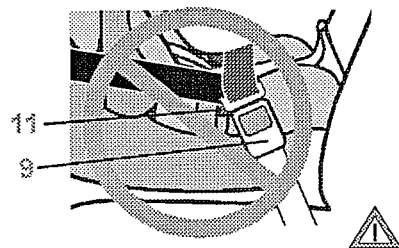


52

- the vehicle seat buckle 9 is **not positioned in or in front of** the light blue belt guide 11,
- the vehicle seat belt is tightened up and not twisted.

#### 5. Fitting the sunshade

- ☞ Pull the elastic seam 14 over the upper edge of the baby seat.
- ☞ Push the clasp 15 of the canopy frame onto the handle mounting 5.

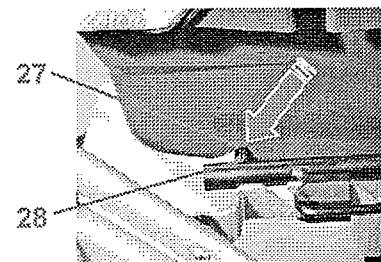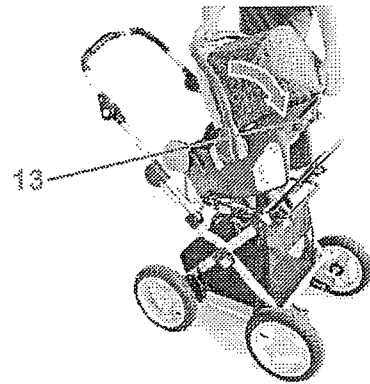

52

## 6. Fitting in a pram


The RÖMER BABY-SAFE plus can be fitted in teutonia brand prams and britax by teutonia using the holder 13 (click & go). Ask your retailer about suitable models.



### For the protection of your baby

- Please observe the safety instructions in the user instructions for your pram.
- Never grasp the child seat to lift or push the pram.

- ✎ Hook the slots 27 of the baby seat into the connection rod 28 on the pram.

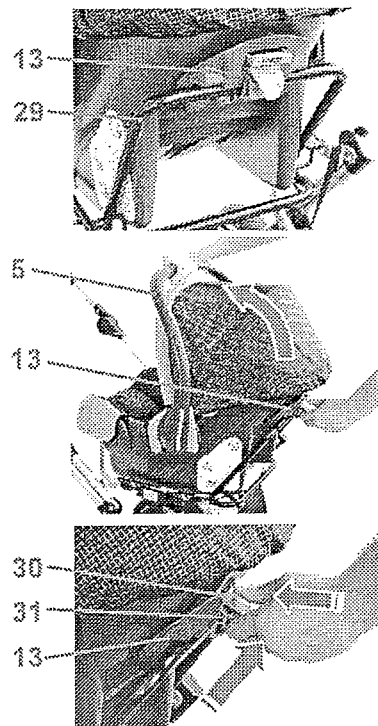

- 53
- ✎ Pivot the baby seat back until the holder 13 (click & go) on the seat frame 29 of the pram engages with an audible CLICK.

**Caution!** Make sure that the baby seat is securely connected to the pram.

#### Removal

- ✎ Hold on tight to the baby seat by the handle 5 .
- ✎ Press the grey button 30 on the holder 13 (click & go) and pull the latch 31 up at the same time.
- ✎ Pivot the baby seat forwards until you can remove it from the pram.



## 7. Care instructions



### To retain the protective effect

- In an accident at a collision speed above 10 km/h the child seat could suffer damage which is not necessarily obvious.  
In this case, the child seat must be inspected by the manufacturer and if necessary replaced.
- Regularly check all important parts for damage. Ensure the correct operation of all mechanical components.
- To prevent damage or breakage, ensure that the child seat does not become jammed in the car door, seat runners, etc.




- Should the child seat be damaged (for example after dropping it) it must be inspected by the manufacturer.

### 7.1 Care for the harness buckle

The function of the harness buckle is important for the safety of your child. Malfunctions of the harness buckle are mostly attributable to accumulations of dirt and dust.

#### Malfunction

- The buckle tongues are ejected only slowly when the red release button is pressed.
- The buckle tongues will no longer lock home (are ejected again).
- The buckle tongues engage without an audible "click".

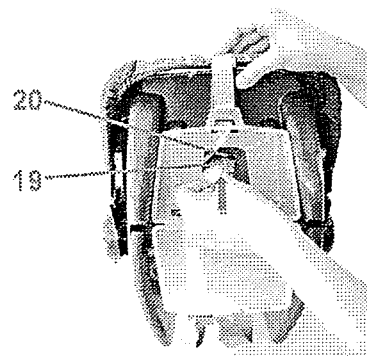

32


- The buckle tongues are difficult to insert (you feel resistance).
- The buckle only opens if extreme force is applied.

#### Remedy

Wash out the harness buckle so that it functions properly once again:

##### 1. Removing the harness buckle

- ✦ Open the harness buckle 1 (press the red release button).
- ✦ Loosen the harness straps (see 3.4).
- ✦ Tilt the baby seat backwards and open the user instructions compartment.
- ✦ Push the metal plate 19, with which the harness buckle 1 is fixed to the seat shell, on its side upwards through the belt slot 20.

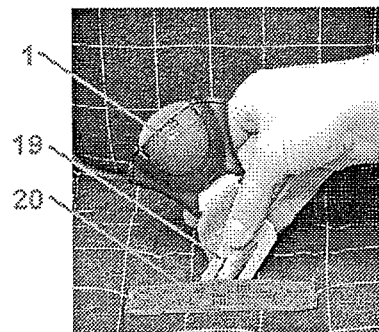

## 2. Cleaning the harness buckle

- ✂ Soak the buckle 1 in warm water with dishwashing liquid for at least an hour. Rinse and dry thoroughly.

## 3. Re-fitting the harness buckle

- ✂ Push the metal plate 19 on its side downwards through the belt slot 20 in the cover **and through the seat shell**. Check for correct fitting by pulling firmly on the harness buckle 1.

## Malfunction

- The buckle tongues 2 can no longer be inserted into the buckle housing 1.

## Remedy

- ✂ Unlock the buckle 1 by pressing the red release button.



## 7.2 Cleaning


Please be sure to use only original RÖMER replacement seat covers, as the seat cover is important to the proper functioning of the system. Replacement seat covers are available from your retailer and or at ADAC (German Motoring Club) branches.



The child seat must **not be used without the seat cover**.

- The **cover** can be removed and washed with a mild detergent using the washing machine's cycle for delicate items (30 °C). Please observe the instructions on the washing label of the cover. The colours of the cover may fade if washed at more than 30 °C. Do not spin, and never tumble dry in an electric clothes dryer (the fabric may separate from the padding).






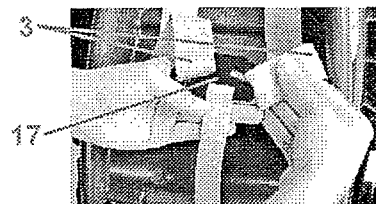

- The **plastic parts** can be cleaned using soapy water. **Do not** use harsh cleaning agents (such as solvents).
- The **harness** can be removed and washed in lukewarm soapy water.  
**Caution!** Never remove the buckle tongues 2 from the straps.

### 7.3 Removing the cover

- ✦ Open the harness buckle 1 (press the red release button).
- ✦ Unhook the shoulder straps 3 from the connecting piece 17.

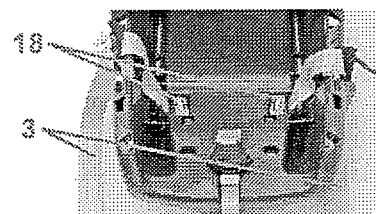
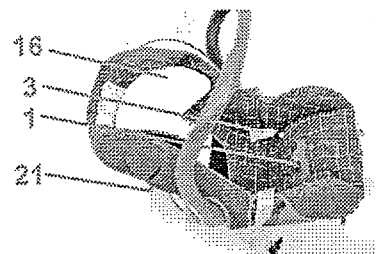
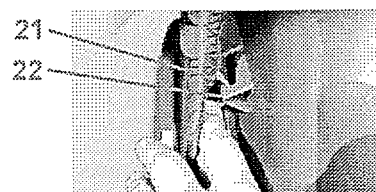


#### 6

- ✎ Take the elastic loops 21 of the cover off the hooks 22 under the edge of the baby shell.
- ✎ Pull the shoulder straps 3 out of the belt slots 6 of the baby shell.
- ✎ Unthread the shoulder straps 3 and the buckle tongues 2 from the cover.
- ✎ Unthread the harness buckle 1 from the cover.
- ✎ Unthread the shoulder pads 25.
- ✎ You can now remove the headrest 16 and the cover.

### 7.4 Removing the harness

- ✎ Unhook the shoulder straps 3 and the cover as described above (see 7.3).
- ✎ Pull out the metal part 18 which is used to fasten the strap 3 to the bottom of the baby shell.

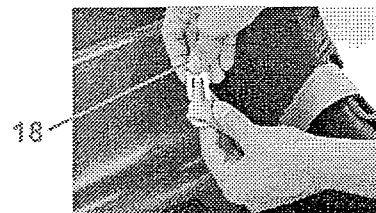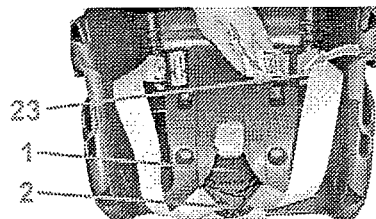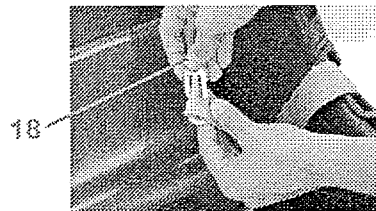

- Push the strap loop inwards from the short side of the metal part 18 and unhook the strap.



You can now pull the strap out.

### 7.5 Installing the harness

- Engage the buckle tongues 2 in the harness buckle 1 (see 3.5).
- Now take the strap loops which are marked with an additional seam and thread them first through the outer and then through the inner side slots 23 of the baby shell.

**Caution!** Do not twist the belts.



- Hook the metal part 18 into the strap loop (first the long side and then the short side of the metal part 18).

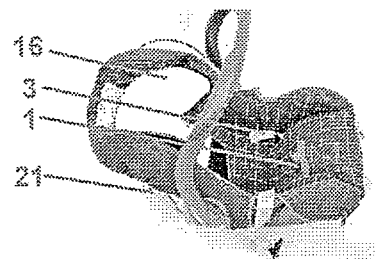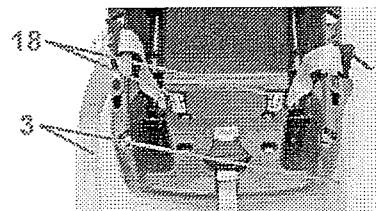

- ❏ Pull the strap 3 until the metal part 18 is seated squarely in the recess of the baby shell.
- ❏ Open the harness buckle 1 again.
- ❏ Hook the shoulder straps 3 and the cover into place as described above (see 7.6).

#### 7.6 Re-fitting the cover

- ❏ Put the cover with the recess over the headrest 16.
- ❏ Thread the shoulder straps 3 and the buckle tongues 2 through the cover.
- ❏ Thread the harness buckle 1 through the cover.
- ❏ Thread the shoulder pads 26 with the connecting elastic through the belt slots of the headrest cover.
- ❏ Now cover the headrest 16.

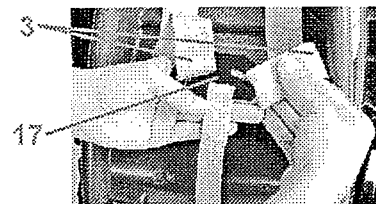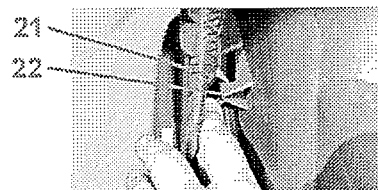


52

- ✎ Place the elastic loops 21 around the hooks 22 on the edge of the baby shell.
- ✎ Engage the buckle tongues 2 in the harness buckle 1 (see 3.5).
- ✎ Thread the shoulder straps 3 through the shoulder pads 26 and the belt slots.  
**Caution!** Do not twist or interchange the shoulder straps 3.


- ✎ Hook the shoulder straps 3 back onto the connecting piece 17.

## 8. Notes regarding disposal


Please observe the disposal regulations in your country.

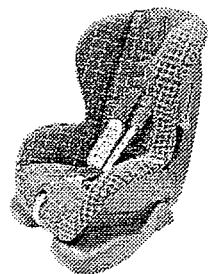

**RÖMER LORD**

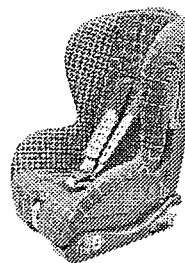

**RÖMER DUO**

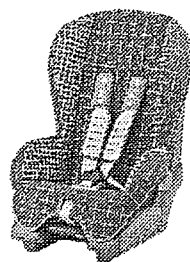

**RÖMER KING quickfix**

## 8. Disposal

Disposal of packaging	
	Container for paperboard
Disposal of components	
cover	garbage, thermal utilisation
plastic parts	container corresponding to the label on the part
metal parts	container for metals
webbing	container for Polyester
buckle and tongue	garbage

## 9. Next child safety seat

RÖMER Child safety seat	Tested and certified according to ECE R 44/03	
	Group	Body weight
<ul style="list-style-type: none"> <li>• LORD</li> <li>• KING quickfix</li> <li>• DUO</li> </ul>	I	9 to 18 kg



### 10. 2-year warranty

For this car/bicycle child seat we provide a 2-year warranty against manufacturing or material defects. The warranty period is effective from the day of purchase. As proof we ask that you fill out the Warranty Card and retain it for the whole term of the warranty period, together with the Transfer Check signed by you and your sales receipt.

In the case of a warranty claim, the Warranty Card must be returned together with the product. The Warranty covers only car/bicycle child seats which have been handled properly and which have been sent to us in a clean condition.



### The Warranty does not cover:

- natural signs of wear and damage resulting from excessive stress.
- damage resulting from inappropriate or improper use.

### What is covered by the Warranty?

**Fabric:** All of our fabrics meet very high requirements with regard to colour fastness when exposed to UV radiation. Nevertheless, all fabrics fade when exposed to UV radiation. This is not a material defect, but rather a normal sign of wear which is not covered by the Warranty.

**Buckle:** Buckle malfunction is often due to accumulations of dirt and dust which may stop it from working properly. If this happens, the buckle can be washed out. Please refer to your user instructions.



Please contact your retailer directly in the event of a warranty claim. He or she will give you the advice and support you need. When processing claims, product-specific depreciation rates will be applied. Please refer to our General Terms and Conditions which are available from your retailer.

#### **Use, care and maintenance**

The car/bicycle child seat must be used in accordance with the user instructions. We would like to point out that it is extremely important that only RÖMER accessories and replacement parts are used.





## 11. Warranty Card / Transfer Check

Name:

\_\_\_\_\_

Address:

\_\_\_\_\_

Post Code:

\_\_\_\_\_

City/Town:

\_\_\_\_\_

Telephone No. (including  
area code):

\_\_\_\_\_

e-mail address:

\_\_\_\_\_

\_\_\_\_\_

Car/bicycle child seat:

\_\_\_\_\_

Article No.:

\_\_\_\_\_

Fabric colour (design):

\_\_\_\_\_

Accessories:

\_\_\_\_\_





### Transfer Check:

- |                             |                                     |                                                                                                                                                                                               |
|-----------------------------|-------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1. Completeness             | <input type="radio"/> examined / OK | <input type="radio"/> I have examined the car/bicycle child seat and ensured that the seat has been sold to the above customer in a complete and fully functional condition.                  |
| 2. Function test            |                                     |                                                                                                                                                                                               |
| - Seat adjustment mechanism | <input type="radio"/> examined / OK | <input type="radio"/> I have received sufficient information on the above product and its functions before purchase and noted the manufacturer's user instructions supplied with the product. |
| - Belt adjustment           | <input type="radio"/> examined / OK |                                                                                                                                                                                               |
| 3. Intactness               |                                     |                                                                                                                                                                                               |
| - Seat                      | <input type="radio"/> examined / OK |                                                                                                                                                                                               |
| - Fabrics                   | <input type="radio"/> examined / OK |                                                                                                                                                                                               |
| - Plastic parts             | <input type="radio"/> examined / OK |                                                                                                                                                                                               |

Date of purchase: \_\_\_\_\_

Buyer (signature): \_\_\_\_\_

Retailer: \_\_\_\_\_

Retailer's stamp